# 960H DVR (Entry Grade)

# ### ---- () <u>-</u>

#### **HE-4000 Series**

#### **Price-Affordable Entry Grade DVR**



- ezP2P™ Cloud Service without any complicated network setting
- ezLink™ for Instant Live Monitoring with Mac Address Input
- 2 x Typical PUSH Functions
  - PUSH Video Call to iPhone/iPad & Android Phone
  - PUSH Network Connection under Sensor Event
- POS Function up to 4 sets of POS Devices
- Startup Wizard for Easy Configuration
- Remote Monitoring by Remote S/W(CMS) & Smart Phone
- Talk-Back Function for 2-way communication with Smart Phone



[HE-4004/8AX]



[HE-4016CX]

MODEL		UE 4004AV (4 Ch)	[HE 4000AY (0.Ch)	LIE 404CCV (4C Ch)
MODEL		HE-4004AX (4 Ch)	HE-4008AX (8 Ch)	HE-4016CX (16 Ch)
Compression Algorithm		Video : H.264, Audio : ADPCM		
Max. HDD Bay		1 x SATA HDD		2 x SATA HDD (1xSATA HDD & 1xDVD)
Operating System			Embedded Linux	
Video	Input	4 Ch	8 Ch	16 Ch
Video	Loop-Out		Not Available	
Video Mode		NTSC/PAL Selectable		
Live Display (NTSC/ PAL)		120/100 fps	240/200 fps	480/400 fps
Screen Modes for Live Display		1 & 4	1, 4 & 9	1, 4, 9 & 16
Video-Out	Monitor	VGA & HDMI & Spot (or VGA & HDMI & Composite)		
	Resolution	HDMI: 800x600, 1024x768, 1280x1024, 1920x1080 (Selectable)		
Recording Speed (NTSC/PAL)	352x240/288(CIF)	120/100 fps	240/200 fps	480/400 fps
	720x240/288(2CIF)	120/100 fps	240/200 fps	480/400 fps
	720x480/576(D1)	120/100 fps	240/200 fps	480/400 fps
	960x480/576(960H)	120/100 fps	240/200 fps	480/400 fps
Recording Resolution		NTSC : 352x240, 720x240, 720x480, 960x480 PAL : 352x288, 720x288, 720x576, 960x576		
Recording Modes		Continuous, Scheduled, Sensor-Activated & Motion Detection Recording		
		Pre & Post Alarm Recording, Emergency Recording, Quick Backup		
Playback & Search	Speed	x1, x2, x4, x8, x16, x32		
	Ch & Resolution	1, 4, 9 & 16 Ch at 960H		
	Function	Intelli-Search by Time Bar, Calendar (Date & Time) and Event Search		
Audio Input / Output		1 Ch / 1 Ch		
Alarm Input / Relay Output		4 Ch / 1 Ch		
P/T/Z Control (RS-485)		Virtual Joy-Stick Control on screen by Mouse		
		Pan/Tilt/Zoom/Focus/Iris by Keyboard		
LAN Network Function		Gigabit Ethernet (RJ45)		
		Fixed IP, DHCP & DDNS  1) Dual Stream (Local Recording & Network Transmission)		
		1) Dual-Stream (Local Recording & Network Transmission)		
		2) Network Bandwidth Control (25 Kbps ~ 1000 Mbps)		
		3) Live Monitoring, Remote Playback and File Backup (Triplex-on-Remote)		
		4) Time Synchronization by NTP Server ("pool.ntp.org")  5) Pomoto & E. Mail Notification, Pomoto System Pohoot by IE. Pomoto PTZ Control		
		5) Remote & E-Mail Notification, Remote System Reboot by IE, Remote PTZ Control 6) P2P Cloud Service (Auto Port forwarding)		
	Software			
Remote Management	Web (IE)	CMS & MMS (SmartViewerPro or MobileViewerPro) Live Monitoring, Playback & System Configuration		
	Internal		Available	DVD Burner (Option)
Backup Device  System Recovery after F	External		ODD, Network Backup by CMS, File Upload to	
			uto-Reboot and Journaling File System	or it derver
System Recovery after 1 ower 1 andre		Firmware Upgrade by USB & CMS over Network		
Advanced Functions		2) Import & Export of Setting Value, Water-Mark, AVI File Backup		
		3) Quick Setup to designate Recording Period		
		4) HDD SMART Info (Model, Capacity, Bad Sector, Temperature, Used Period)		
		5) Warning Alarm for System Over-Temperature		
		6) Help Message for easy setup & Multi-Language support		
		7) Digital Zoom for both Live & VOD mode		
			ased (USB to Serial support, TCP/IP Network)	
POS		Display POS Data on Live & Playback		
System Operation		Front Button, IR Remote Controller, USB Mouse, Keyboard (Option)		
Power			x X 3A D/C	12V x 5A D/C
Operating Temperature and Humidity		12 V	5~40 °C / 20~90% RH	IZV X ON DIO
Dimension (WxDxH)		264 v 2	245 x 44 (mm)	360 x 380 x 66 (mm)
Certification		204 X 2	CE & FCC & KCC & WEEE, RoHS	555 X 556 X 66 (IIIII)
Ochinodion		GE & FOO & NOO & WEEE, NOO		

(\*) Specification is subject to change without prior notice.



#### ezP2P™ Cloud Service (www.ezp2p.com)


ezP2P™ Cloud Service is a cloud-based video management system without any complicated network setting. Just login to ezP2P™ Cloud Server (www.ezp2p.com) with your own account and enjoy thumbnail preview and instant live monitoring.





[Main Page]

[Preview]

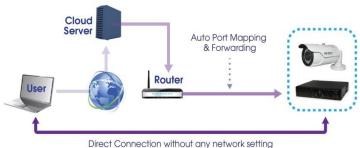



ezLink™ with Mac Address

The easiest way to connect to the DVR



## **Startup Wizard**

Startup Wizard will guide you through the whole process of system startup. You can setup major DVR Configuration by just following the steps which Wizard guides and also can reconfigure these setting at any time by accessing to main menu.











[Language]

[Date/Time]

[Record]

[HDD]

[Network]

### Typical PUSH Function

2 PUSH Functions below provides you with efficient monitoring and control of your DVR. It allows you to be free from constant attention to the event that may or may not happen.

#### **PUSH Video Call**

to iPhone & Android Phone



#### **PUSH Network**

Connection under Sensor Event



### **Integrated Network Solution**

Guarantee unlimited scalability and seamless integration of all FOCUS products such as DVR, NVR & IP Camera over unique network.







[CMS]

[SmartViewerPro / MobileViewerPro]